Print on plain white paper - Part # 122919

INSTRUCTIONS FOR BULB REPLACEMENT MODEL "L" LIGHTS

CAUTION: The light bulb operates at extreme high temperatures. Do not attempt to remove the bulb until it has cooled for at least 2 minutes after the light has been turned off.

1. Remove the lamp shield and reflector cover by pushing in and turning the lamp shield **counter clockwise** (See Figure 1).

2. Remove the bulb by pulling straight out (See Figure 2).

3. To install the new bulb, align the contact pins with the socket holes and press the bulb in firmly .

CAUTION: Install the bulb without removing its protective plastic cover (See Figure 3). Finger marks left on the bulb glass during installation will reduce the bulb life. If the bulb is accidentally handled, wipe it clean immediately with denatured alcohol.

Figure 3

4. Place the reflector cover in position over the reflector (See Figure 1). Insert the lamp shield through the hole in the reflector cover and onto the socket holder (make sure to align the locking tabs). Push in and turn the lamp shield approximately 1/8-turn **clockwise** to lock in place.

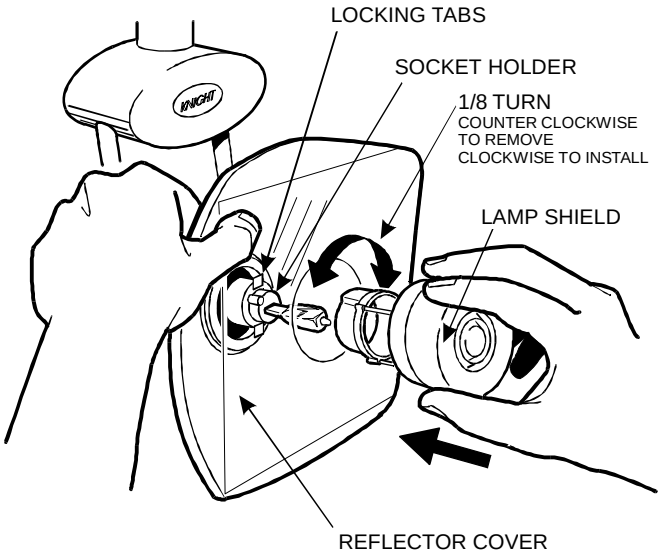

Figure 1

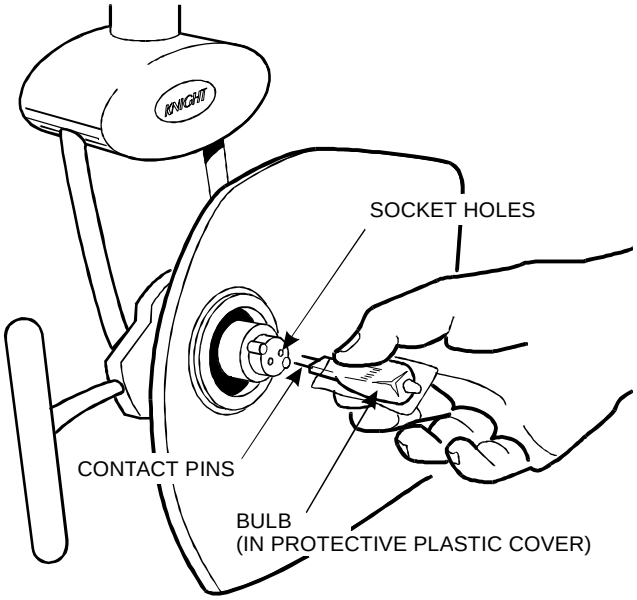

Figure 2

Knight®
by Midmark

Midmark Corporation • P O Box 286 • 60 Vista Drive
Versailles • Ohio • 45380-0286 • www.midmark.com
Phone: 937-526-3662 Fax: 937-526-5542